



## Description

**Electronic headlight tester RY-RM** equipped with a camera for a complete analysis of headlights, valid for all types of headlights.

**Valid for European, American and Japanese vehicles.**

## Technical Data and Dimensions

Lights	LED, BILED, BEAM, LOW BEAM, XENON, BIXENON, FOG BEAM, HALOGEN & TURNING LIGHT
Number of wheels	3
Measuring range	150,000 cd
Error	± 5%
Connectivity	RS232, WiFi, Bluetooth
<b>MEASURING RANGE</b>	
Top and bottom alignment	0 - ± 600 mm 10 m (0; ± 6 %)
Right and left alignment	0 - 1,000 mm 10 m (0; ± 10 %)

## Standard Equipment


- ✓ Viewfinder and laser pointer
- ✓ RS232 and Bluetooth ports
- ✓ 5.7" Touchscreen and reversible screen support
- ✓ Headlight tester software (integrated in the device)
- ✓ SMRW control software (PC)

## Optional Equipment


Optional equipment
Height sensor
LAN connection
Tilt sensor
Single rail
Double rail on floor
Double rail in civil works
Single Bluetooth



## SMRW software in english

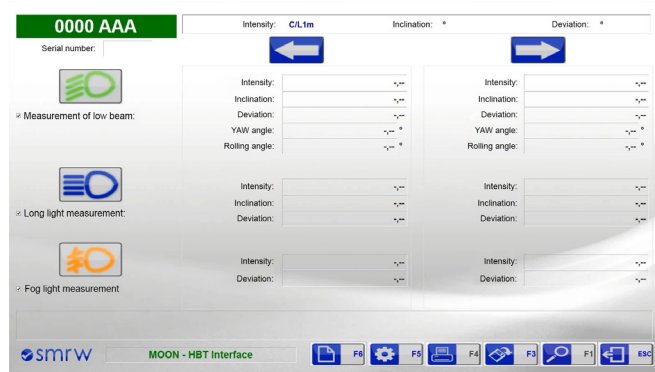

## Integrated Software



Tolerance	
Toll. Orizz.	0,5 %
Toll. Vert.	0,1 %
Lum. MAX	090 lx
Lum. min	006 lx