



Compatibility



Description

The **DC-40 portable charger** connects directly to a 63-amp three-phase power outlet to deliver a **charging power of 40 kW** for all vehicles equipped with a **CCS2** connector.


Equipped with wheels, the DC-40 charger is ideal for multi-purpose workshops, as it offers the flexibility to **charge electric vehicles anywhere in the workshop**.

Designed to meet the needs of workshops that **lack charging facilities** or where such facilities are overloaded. It is characterized by its adaptability to existing electrical infrastructure, as it can operate in different modes to accommodate a three-phase power grid.

Technical Data and Dimensions

Power input	16 A/32 A/63 A 3 ph
Charging output	7 kW/20 kW/40 kW
Dimensions	210 x 550 x 370
Connection type	Bluetooth (App)

Software

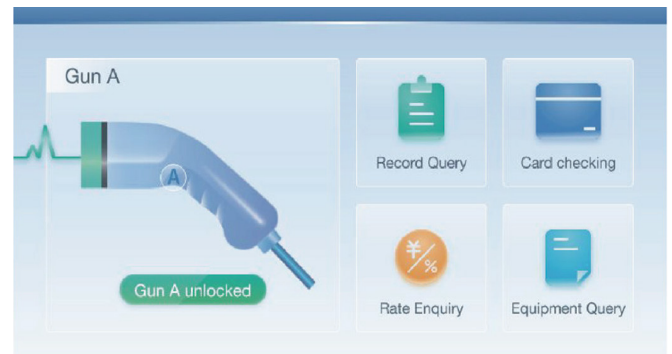

Standard Equipment

- ✓ Charger Unit
- ✓ CCS2 Charging cable
- ✓ 63 amp Comando plug extension (3m length)

