

PLAY DETECTOR DHA

The ELECTRO-HYDRAULIC control device is suitable for checking the axles of agricultural vehicles and their components, of the possible wear and tear and the play caused by it.

The test plates installed on the floor at ground level, is guided in its movements by the switches mounted on the lamp handheld.

The latest technologies have been used to create the equipment, adding the maximum precision in its finish, achieving a Robust machine with excellent aesthetics, quiet operation and precise.

Supplied in two independent plates, extensible connecting beam and access ramps for easy assembly and disassembly.


Standard Equipment

Hydraulic play detector with transversal and longitudinal movement
Hydraulic group

- Electric box
- Coupling hoses
- Wired control torch

Technical Data

Maximum axle load	5 Tn.
Motor	5,5 CV.
Voltage	230 V.
Max. Side movement	100 mm.
Cylinder Thrust Force	7.000 N
Working pressure	70 bars



Mechanics




Epoxy Paint Powder-coated finish ensures optimal and long-lasting protection

Perfect Fit Assembly Mechanical design using Perfect-Fit, which guarantees the assembly and perfect final finish on all our equipment



Scan the QR code and view the video

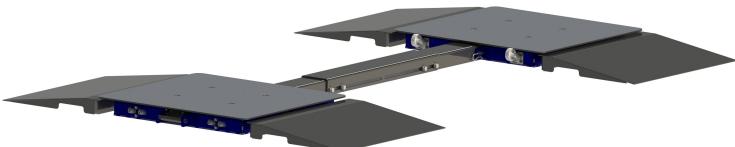



Dimensions

Dimensions del Hydraulic group	500 x 660 x 1.000 mm.
Plate Dimensions	700 x 650 x 72 mm.
Packed equipment dimensions	850 x 750 x 350 mm.
Weight del Hydraulic group	100 Kg
Plate weight (unit)	69,5 Kg
Packed equipment weight	290 Kg



Optional Equipment

